


ultra lavatory faucet GM10, chrome, IR-sensor, solar, without drain assembly, temp. mixing, EXPERT, G3/8

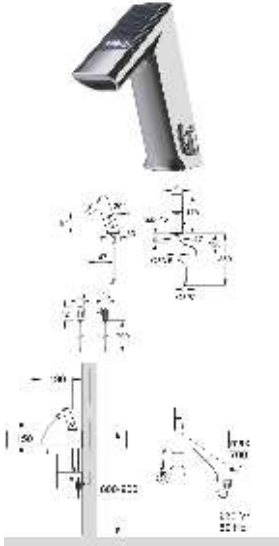

ultra lavatory faucet GM10 EXPERT, with IR sensor, with temperature mixing, solar, chromed

Touchless, electronically controlled lavatory faucet:

- For connection to hot and cold water
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- LCD display: shows the temperature and water flow time
- Continuous water flow via integrated piezo button
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Dual infrared sensors (with automatic setting feature), microprocessor
- Vandal-resistant aerator (replaceable with integrated tool)
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions
- Compatible with Service APP: Control of stored operational data, settings and control functions

Optional:

Valve unit with multi laminar spray head 2 l/min (see accessories)

Notice:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

Nominal connection width: G3/8,

Electronics module: EXPERT, Integrated LCD for displaying temperature and water-flow time

Use: IR-sensor, contact-free activation

Mixture: Temp. mixing, with mixing lever for temperature regulation

Power supply: Solar, photovoltaic cell in combination with 4 x 1,5V Alkaline AA batteries (support batteries) commercial; life time up to 8 years

Drain assembly: Without drain assembly,

Colour: Chrome,

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries (support batteries) commercial; life time up to 8 years

Operating pressure: 0,3 - 10 bar

Water temperature (max.): 80 °C

Flow rate: Approx. 6 l/min (3 bar)

Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min. (fixed)

Sensor sensitivity: Automatic self-adapting sensor technology

Built-in filters: 0,5 mm mesh size

Aerator: Aerator RC

Flexible hose: 350 mm

Angle valve connection: G 3/8"

Engineering standards: DIN EN 200; CE