


ultra wall-mounted faucet GW20, chrome, IR-sensor, VARIOconnect, metall, no temp. mixing, G1/2

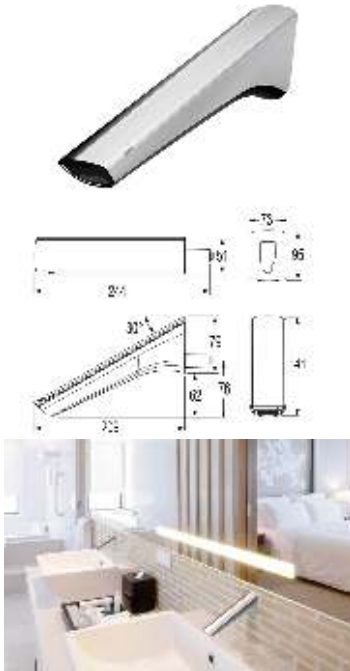

ultra concealed wall-mounted faucet GW20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed - final installation set

Touchless, electronically controlled lavatory faucet:
for cold or premixed water

- Sturdy metal housing
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Dual infrared sensors (with automatic setting feature), microprocessor
- Vandal-resistant aerator (replaceable with integrated tool)
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter
- One Tool Service - all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- Compatible with Service APP: Control of stored operational data, settings and control functions

Notice:

Service APP only available in conjunction with BLE Converter - no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered separately.

Colour: Chrome,

Power supply: VARIOconnect, single- and multiple power supply (accessories)

Use: IR-sensor, contact-free activation

Material: Metall,

Mixture: No temp. mixing, for cold or premixed water

Nominal connection width: G1/2,

VARIOconnect: For single and multiple power supply and data connection (Connection CNX or Service APP - see accessories)

Operating pressure: 0,3 –10 bar

Water temperature (max.): 80 °C

Flow rate (approx.): 6 l/min (3 bar)

Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min. (fixed)

Sensor sensitivity: Automatic self-adapting sensor technology

Built-in filter: 0,5 mm mesh size

Aerator: Aerator RC

Connection: G 1/2

Engineering standards: DIN EN 200; CE