GREEN 1000 SERIES

SPECIFICATIONS

Electronic lavatory faucet activated by infrared sensor. For hot and cold water. Solid brass one-piece construction.

Available with an internally mounted 9V battery, externally mounted 9V battery or a 9V transformer. Filters included. Sensor range is adjustable by remote control. Other sensor settings (delay in, delay out and security time) can also be adjusted by remote control.

Faucet will automatically shut off after being used for more than 90 seconds. Sensor features a low battery level indicator.

OPERATION


Touch free electronic faucet .The faucet is activated automatically when the user brings his hands within the sensor range, and stops when the user removes his hands.

APPLICATION

Deck mounted faucet combining an elegant design with anti-vandal features. Helps washrooms stay cleaner and save water. Prevents cross contamination.

PRODUCT AT A GLANCE

Installation	Lavatory mounted
Recommended Pressure	0.5-8.0 BAR / 7.0-116 PSI. For a pressure over 8 bar use a pressure reducing valve.
Power Supply	 External battery box with 9V Alkaline Battery Internal 9V battery. 9V Transformer
Water Saving Options	6 LPM / 1.58 GPM ; 4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM
Water Supply	Hot and cold water
Water temperature	Max 70º
Security Time	90 seconds. Adjustable with Stern's remote control.

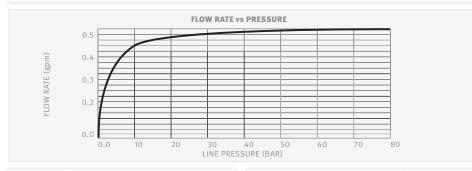


ORDERING INFORMATION

PRODUCTNAME	PART NUMBER
GREEN 1000 AB 1953	225801
GREEN 1000 B AB 1953	225871
GREEN 1000 E AB 1953	225821
GREEN 1000 BRE AB 1953	225891

OPTIONAL ACCESSORIES		
PRODUCTNAME	PART NUMBER	
Matching Green Soap Dispenser - battery operated	225845	
Matching Green Soap Dispenser - transformer operated	225840	
Remote Control	07100005	



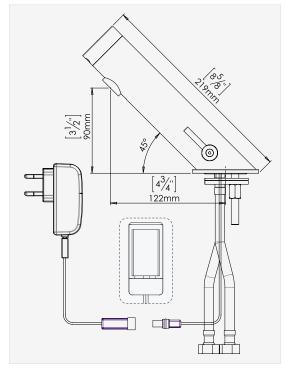



ADVANTAGES







ROBUST BRASS BO



DJUSTABLE SETTIN



APPROVALS









777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com

www.sternfaucets.com