

## Logis

### Single lever bath mixer for exposed installation

Finish: **Chrome** Article Number: **71400000**



#### Description

##### product features

- 2 functions
- projection: 194 mm
- centre distance:  $150 \pm 12$  mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 17 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: s-shaped connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar


#### Technology



#### Product image




#### Scale drawing

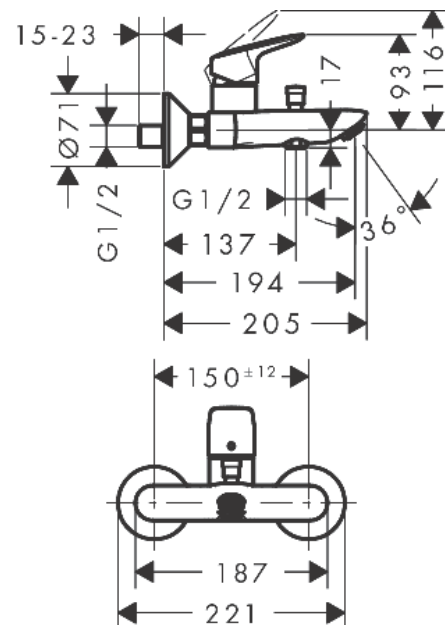

**Logis**  
**Single lever bath mixer for exposed installation**  
 Finish: **Chrome** Article Number: **71400000**



**Flowchart**

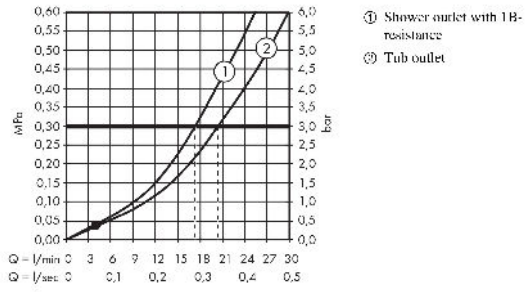


**Logis**  
**Single lever bath mixer for exposed installation**  
 Finish: **Chrome** Article Number: **71400000**



**Exploded Drawing**

Year of production: >01/15

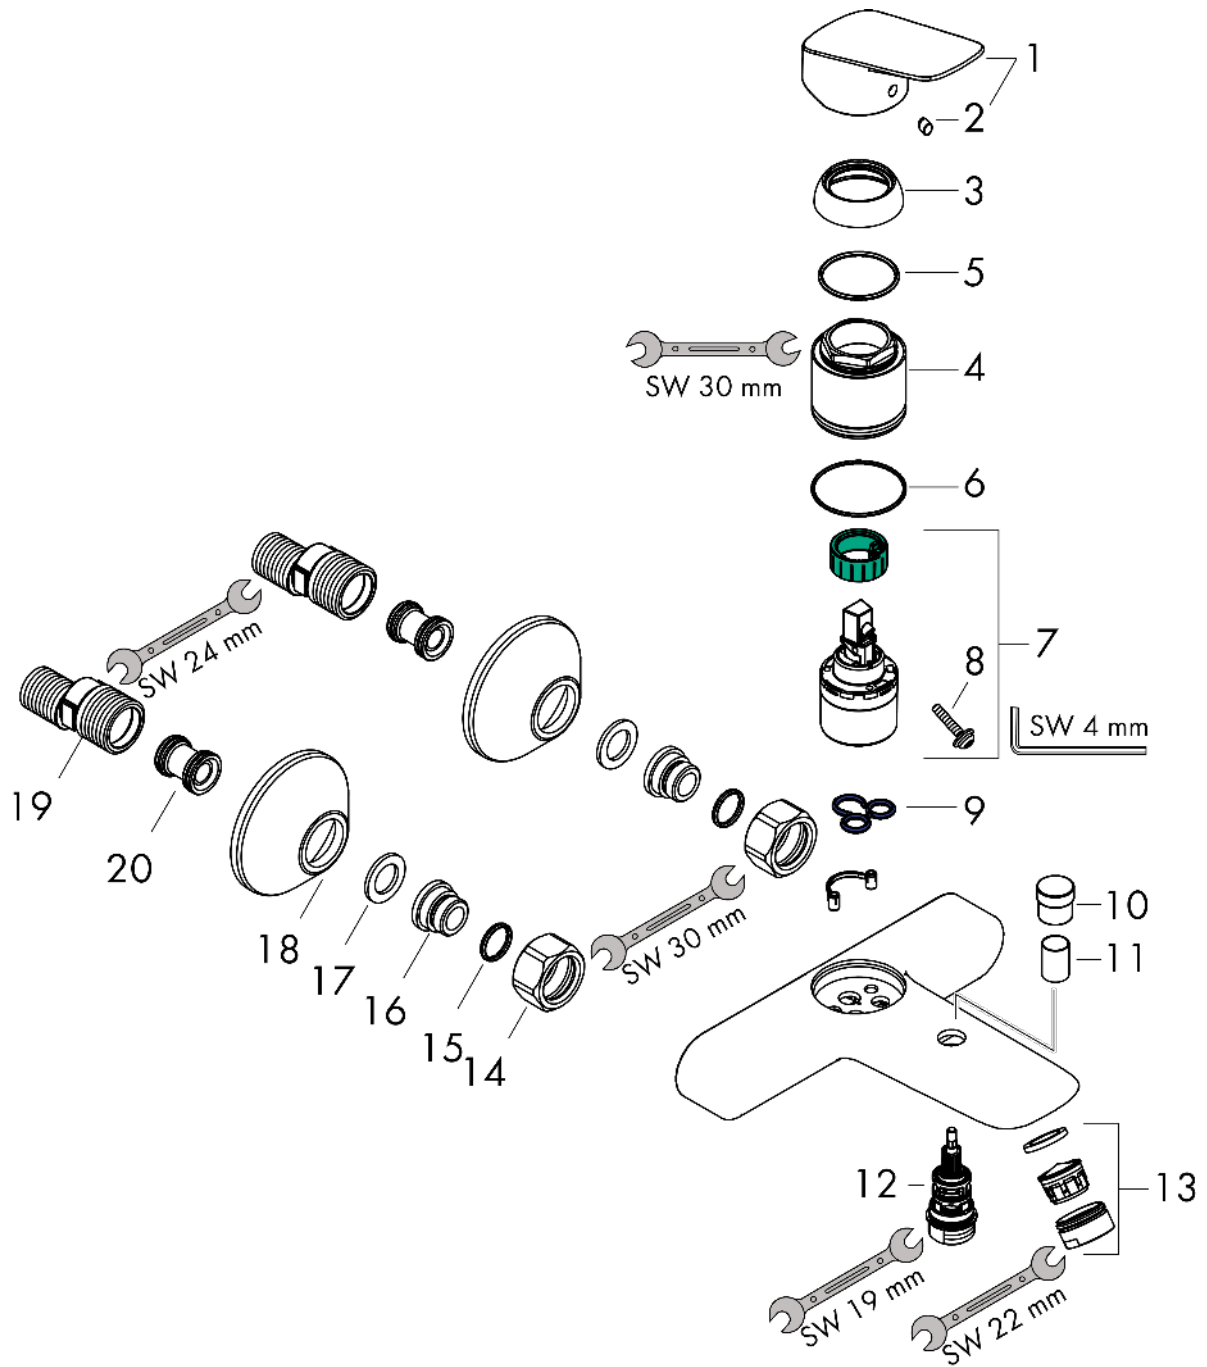

## Logis

### Single lever bath mixer for exposed installation

Finish: **Chrome** Article Number: **71400000**



## Spare part list

Year of production: >01/15

Pos.	Description	Article Number	PC	PU
1	handle	92224000	10	1
2	screw cover	96338000	1	1
3	flange	97406000	6	1
4	nut	97977000	9	1
5	O-Ring 32x2	98193000	1	1
6	O-ring 40x1,5	98464000	1	1
7	cartridge, assy	92730000	11	1
8	locking screw for handle	95140000	2	1
9	seal	95008000	3	1
10	diverter knob	97981000	6	1
11	sleeve	97979000	5	1
12	selector	97978000	11	1
13	aerator M24x1 (30 l/min)	92360000	4	1
14	set of nuts	96157000	8	1
15	O-ring 15x2	98163000	1	1
16	connecting thread	97220000	5	1
17	filter packing	96922000	3	1
18	escutcheon Ø 70 mm	94135000	4	1
19	set of S-unions (±12 mm)	94140000	10	1
20	noise reduction	96429000	2	1
a	set of S-unions (±32 mm)	98592000	9	1